
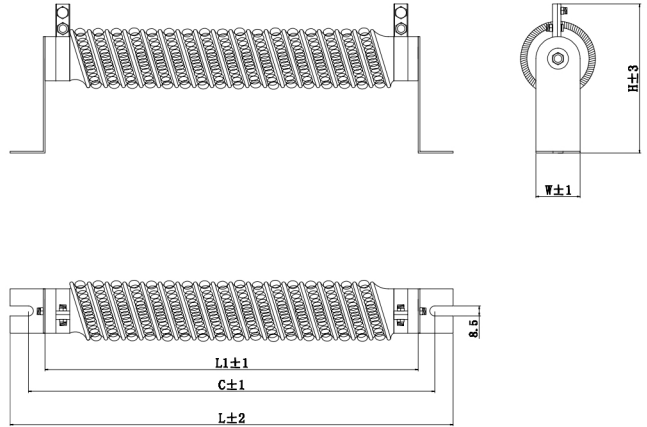


RXG 大功率螺纹线绕电阻器 2KW-6KW

High Power Thread Wire Wound Resistors 2KW-6KW

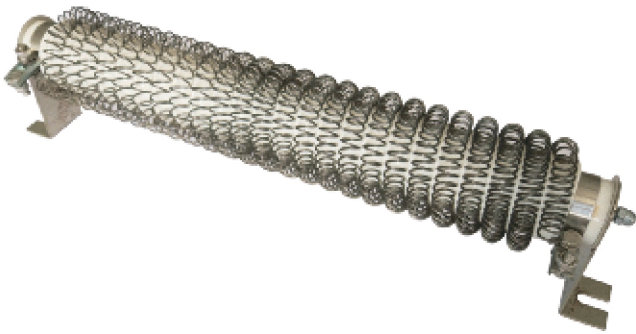

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 可提供安装套件（选购件）
Assembly and fittings (available)

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 适用于功率电源
Applied for functional power supply
- 变频电源等领域
Variable frequency power source etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and breaking parts of industrial controlled servo drive system

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range (Ω)	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)				
				L1	C	L	W	H
RXG	2K-4K	10-100R	±2% (G) ±5% (J)	310	340	370	38	110-130
	4K-6K			410	445	470	38	

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXG	2000W	51R	±5%